



Covac Inc 國美分體空調

Mini-Split Air Conditioner Installation

Retailer & Wholesaler

NEW SHOWROOM!


Tel: Eng (626)823-2267

中文(626)823-5411

CustomerSupport@Covacinc.com

2954 W. Valley Blvd.
Alhambra, CA 91803

www.Covacinc.com

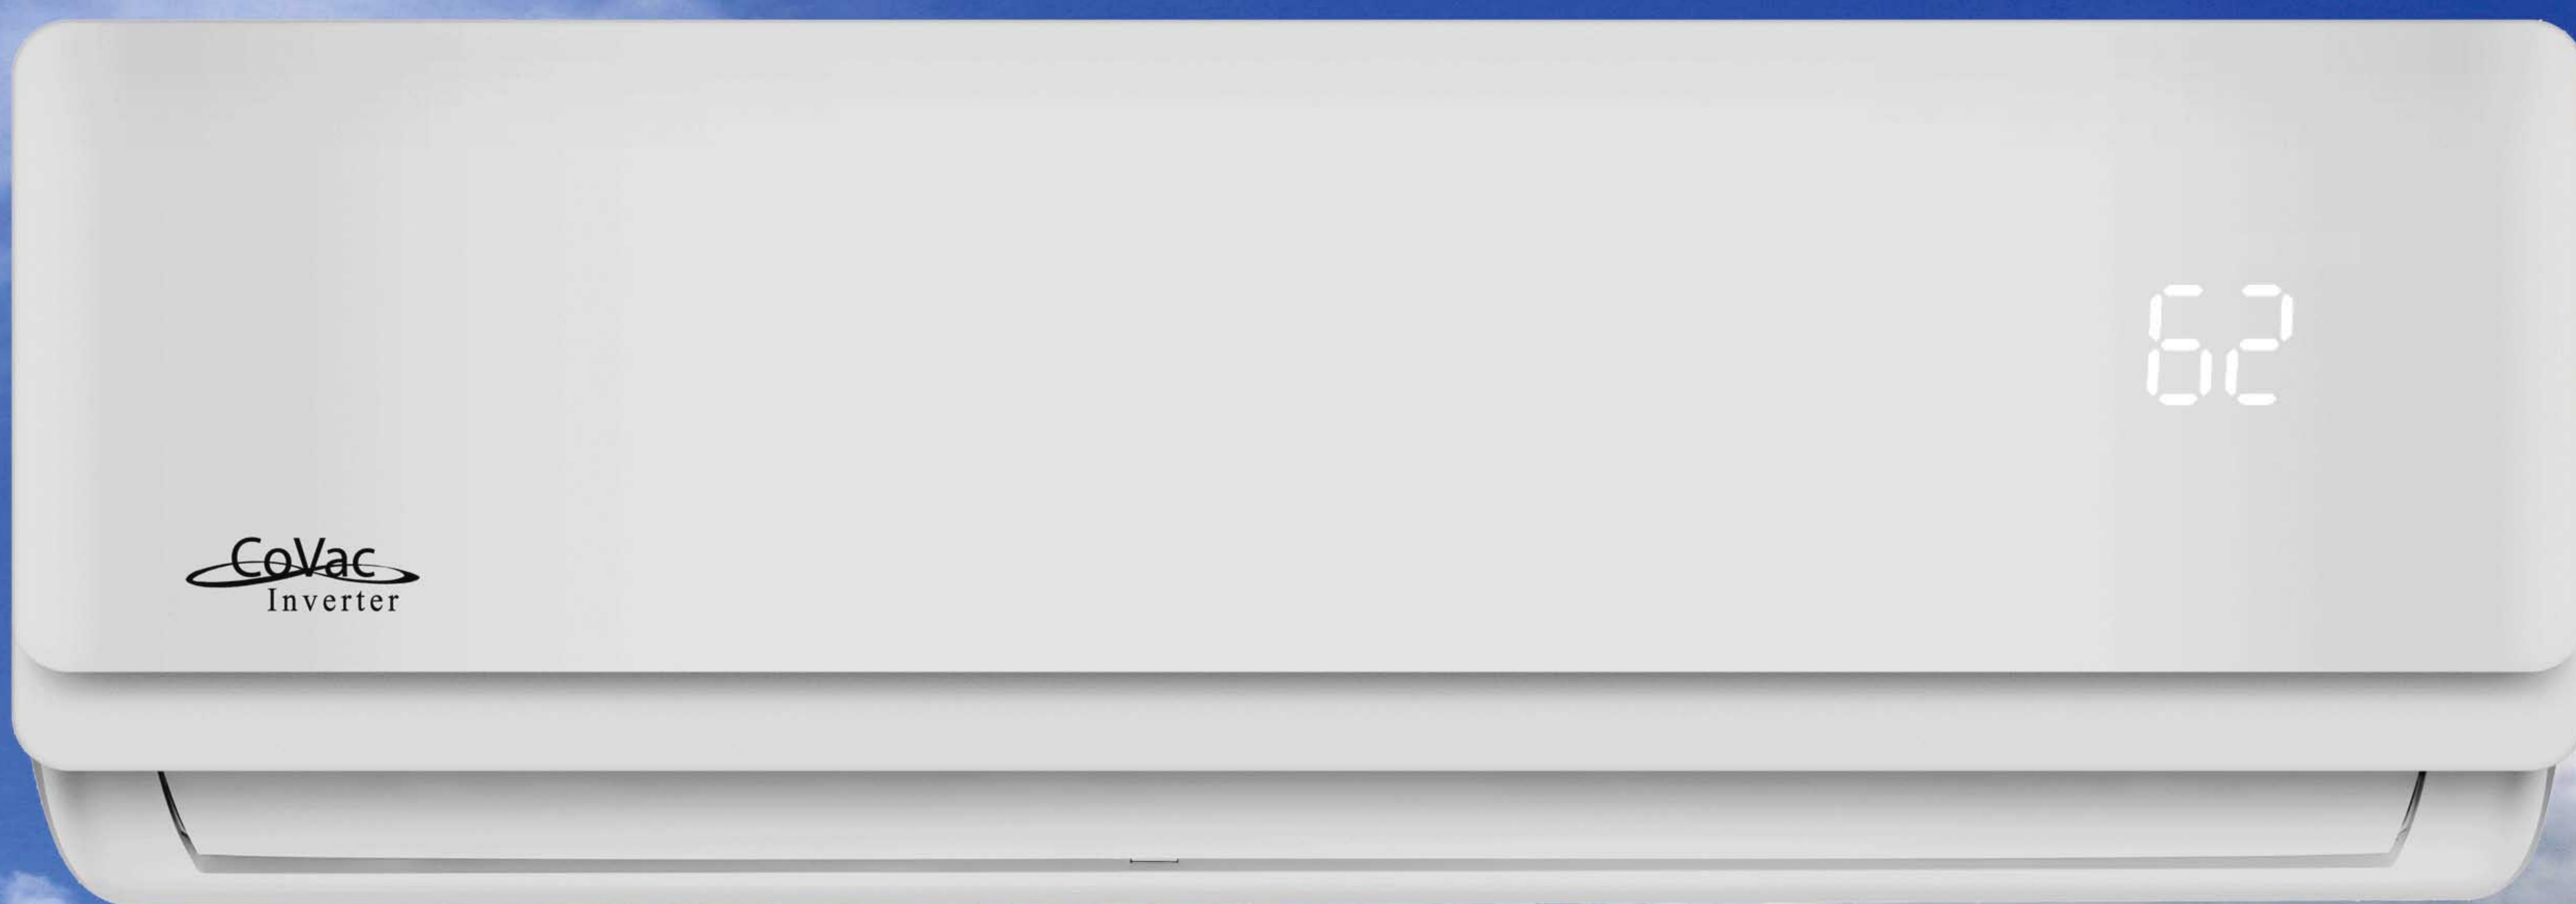

CoVac - Inverter Mini-Split Air Conditioners



- Manufactured by Midea
- Cooling & Heating with Remote Control
- 1 Year Parts + 5 Year Compressor Warranty
- Silent operation with Inverter Technology
- Pre-charged R410a & all accessories included

With high energy efficiency, innovative air filtration technology, and super quiet operation, CoVac's Inverter Mini-Split Air Conditioners are the perfect fit for any home or business. Simple & flexible installation, ability to clean and purify the surrounding air, low energy consumption, and a wide range of functions are just a few of the benefits. We offers quality installation with all warranties, parts, and accessories directly through us.



直接進口 · 批發 · 零售 · 安裝 · 冷暖



Auto-Restart



Turbo Mode



Sleep Mode



LCD Display

All parts and accessories always readily available at our office.

9,000 BTU

12,000 BTU

18,000 BTU

24,000 BTU

36,000 BTU

Application area w/ 8' Ceiling (sqft)		<250	250-450	450-750	750-900	900-1200
Model (Indoor unit model#)		CoVac Series-4 MSABA-09HRFN1-BS0W	CoVac Series-4 MSABB-12HRFN1-BS0W	CoVac Series-4 MSABD-18HRFN1-MS0W	CoVac Series-4 MSABE-24HRFN1-MQ0W	CoVac Series-4 MSABF-36HRFN1-MP0W
Power supply (V-Hz-Ph)		120V-60Hz-1Ph	120V-60Hz-1Ph	240V-60Hz-1Ph	240V-60Hz-1Ph	240V-60Hz-1Ph
Min/Max Circuit Ampacity (Amp)		15/20	15/20	15/20	18/25	25/35
SEER (BTU/W)		19	19	19	17	16
Refrigerant type (Type/oz)		R410A/30	R410A/29.63	R410A/44.09	R410A/62.8	R410A/119.9
Cooling	Watts (W)	780	1020	1645	2500	4235
	Rated current (Amp)	6.8	8.9	7.4	11.0	18.5
	EER (BTU/W)	11.5	10.5	11	9.5	8.5
Heating	Watts (W)	925	1026	1700	2200	3835
	Rated current (Amp)	8.1	8.9	7.4	9.6	16.7
	HSPF4 (BTU/W)	10	9.5	10	9.5	10
Indoor Unit	Operating Temp. Cool/Heat (°F)	62~90/32~86	62~90/32~86	62~90/32~86	62~90/32~86	62~90/32~86
	Noise Level Hi/Mi/Lo (dB(A))	38/32/25	38/30/28	43/35/30	48/42/34	52/44/36
	Dimension WxDxH (inch)	30 x 7.5 x 12	33 x 7.5 x 12	38.5 x 8.5 x 12.5	43 x 9 x 13	50 x 11 x 14
	Packing WxDxH (inch)	31 x 10 x 15	35 x 11 x 15	41 x 12 x 16	46 x 13 x 15	53 x 17.5 x 15
	Net/Gross weight (lb)	20 / 25	23 / 28	24 / 34	35 / 45	43 / 55
Outdoor Unit	Operating Temp. Cool/Heat (°F)	32~122/5~86	32~122/5~86	32~122/5~86	32~122/5~86	32~122/5~86
	Noise level (dB(A))	38~52	38~54	40~57	41~58	42~63
	Dimension WxDxH (inch)	31 x 12 x 22	32 x 13 x 22	32 x 13 x 22	34 x 14 x 28	37 x 16 x 32
	Packing WxDxH (inch)	36 x 15 x 24	37 x 17 x 24	37 x 17 x 24	39 x 17 x 30	43 x 20 x 35
	Net/Gross weight (lb)	75 / 80	83 / 88	90 / 100	113 / 123	145 / 173
Line Set	Refrigerant Pre-charge (ft)	25	25	25	25	25
	Liquid side & Gas side (inch)	1/4" & 3/8"	1/4" & 1/2"	1/4" & 1/2"	3/8" & 5/8"	3/8" & 5/8"
	Max. pipe length (ft)	82	82	98	98	213
	Max. difference in level (ft)	33	33	66	66	98

Remarks: The above design and specifications are subject to change without prior notice for product improvements.

www.Covacinc.com